



DESIGN INSTRUCTIONS

How to design your solar field on ground with the Amfisol ground mounting structure.

1. General concept:

East-West design


Solar modules under 13° tilt

Applicable solar panel:

The Amfisol system can only be used with framed modules with the following dimensions:

- Width: 1134 mm
- Length: from 2000 mm up to 2382 mm
(for other lengths contact us)
- Frame height: 25 – 30 – 35 mm


One shelter consists of two solar panels in landscape orientation

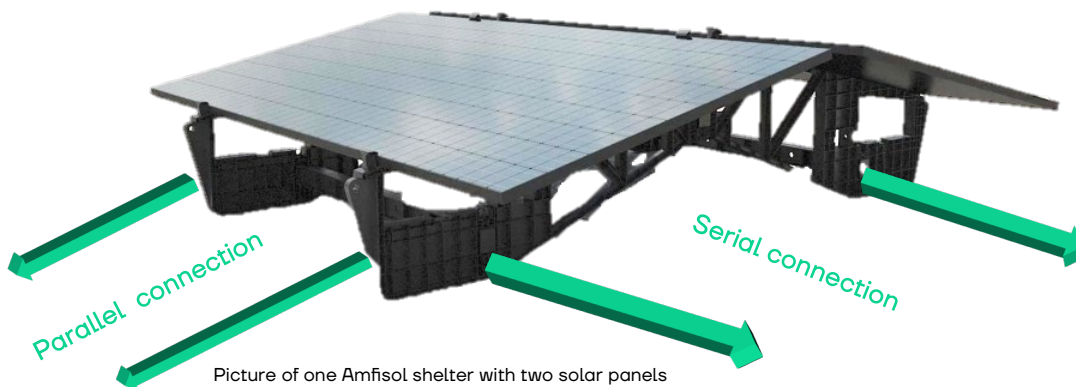


2. Interconnection of the shelters

One shelter (with two solar panels) can be connected to other shelters in two directions:

- Serial connection

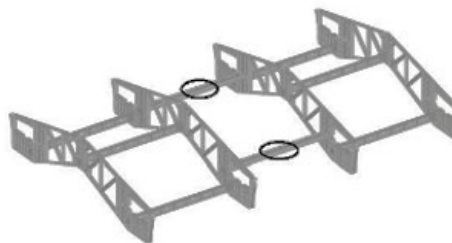

- Parallel connection

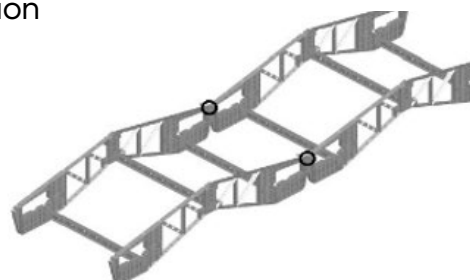




DESIGN INSTRUCTIONS


3. System dimensions

3.1 Serial connection: minimum 3 - maximum 30 shelters

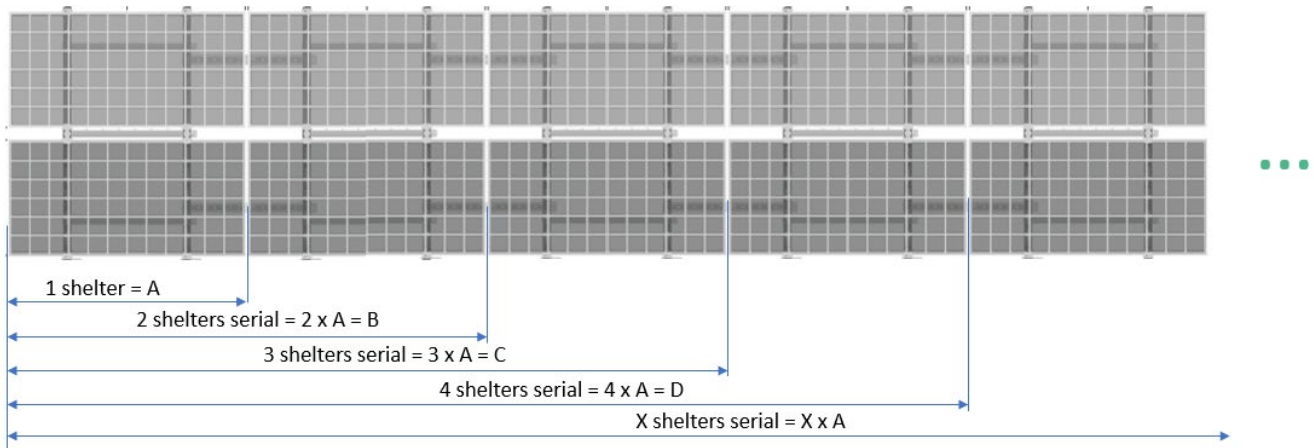

Panel length (mm)	A (mm)	B (mm)	C (mm)	D (mm)
From 2.000 till 2.278	2.308	4.616	6.924	9.232
From 2.279 till 2.382	2.412	4.824	7.236	9.648

3.2 Parallel connection: minimum 3 - no maximum

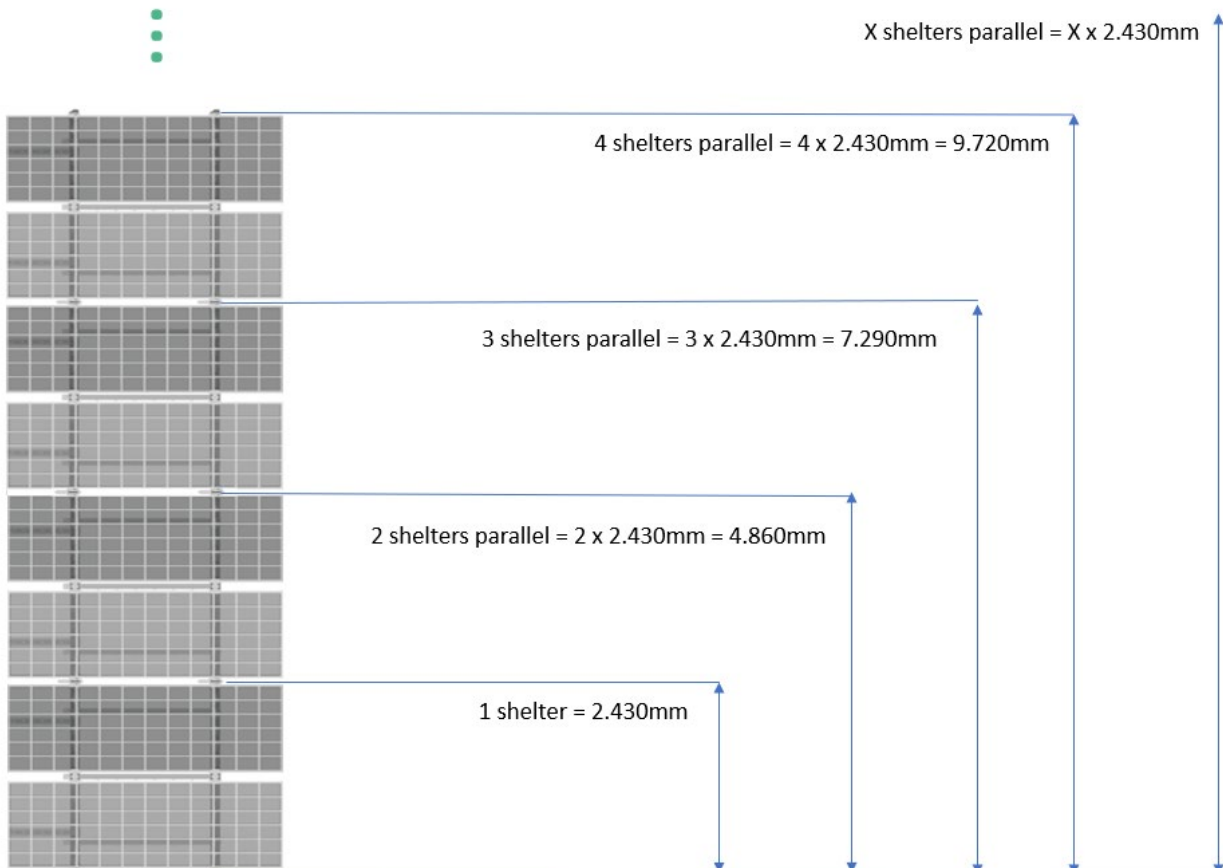




DESIGN INSTRUCTIONS

3.3 Example 3 x 3 shelters

Panel length (mm)	A (mm)	B (mm)	C (mm)
From 2.000 till 2.278	2.308	4.616	6.924
From 2.279 till 2.382	2.412	4.824	7.236

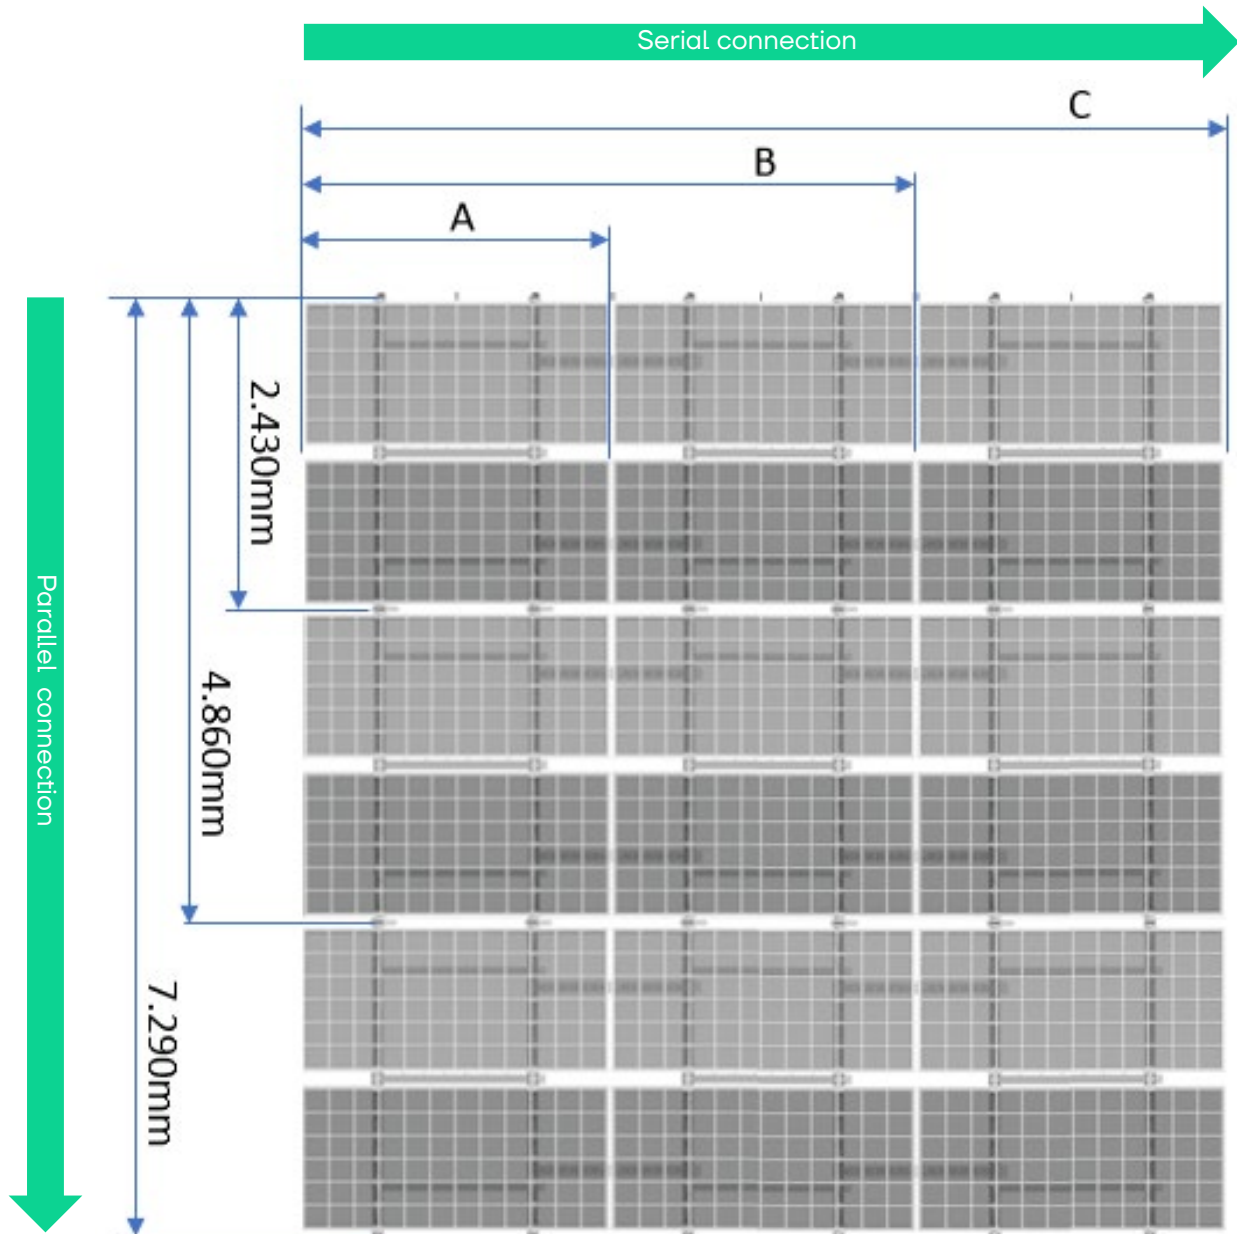



DESIGN INSTRUCTIONS

4. Subfields & service paths

4.1 Subfields

Take into account the minimum and maximum number connections of the shelters

- Serial connections: min. 3, max. 30
- Parallel connections: min. 3, no max.



Any exceptions to these minimum and maximum specifications require prior written approval from AMFISOL BV.

4.2 Service paths

Service paths can be easily integrated within the subfields (or across the entire field).

The width of the service path determines whether additional ballast is required on the shelters forming the path:

- **Service path width ≤ 60 cm:** no additional ballast required.
- **Service path width > 60 cm:** additional ballast is required on the outer shelters forming the service path.

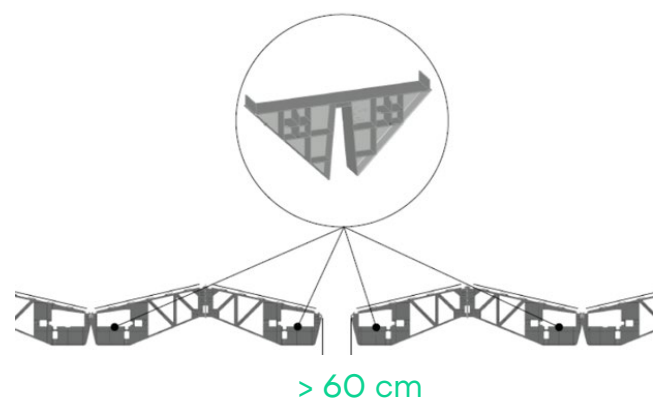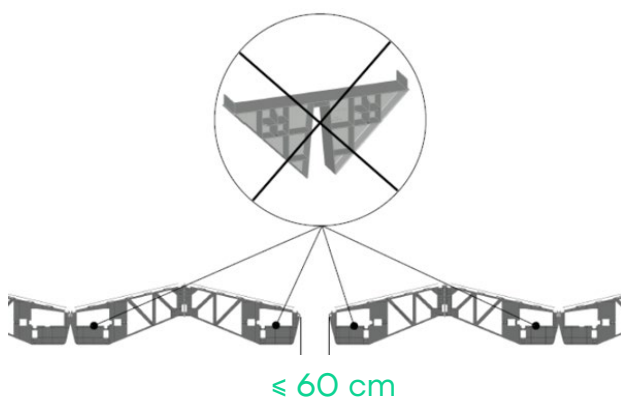



DESIGN INSTRUCTIONS



5. Ballast

- Ballast must be applied to the shelters according to the ballast plan calculated using the AMFISOL ballast tool.


- Ballast is only required on the outer shelters of the solar field. Consequently, only the outer shelters need ballast holders (four ballast holders per shelter or less, if less than four concrete tiles per shelter are required).

- Concrete ballast tiles must be distributed evenly across the four ballast chambers of each AMFISOL shelter. The maximum permitted difference in the number of ballast tiles per ballast chamber within the same shelter is one concrete tile.

- Chambers containing the largest number of ballast stones should always be positioned as close as possible to the outer edge of the solar panel field.
- When the space between two subfields is more than 60 cm, both of the subfields need to be ballasted in the outer shelters of these subfields. When the space is less than 60 cm these subfields are in the 'protected wind zone' and do not need extra ballast. See art. 4.2 service paths.

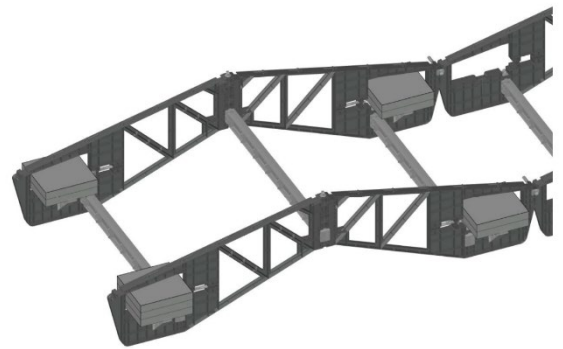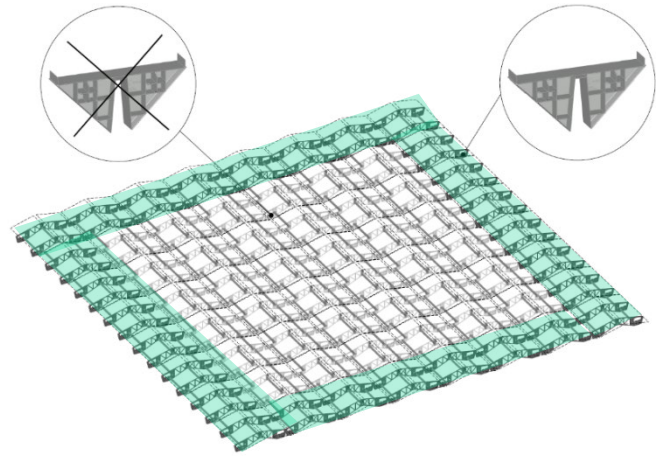

For example:

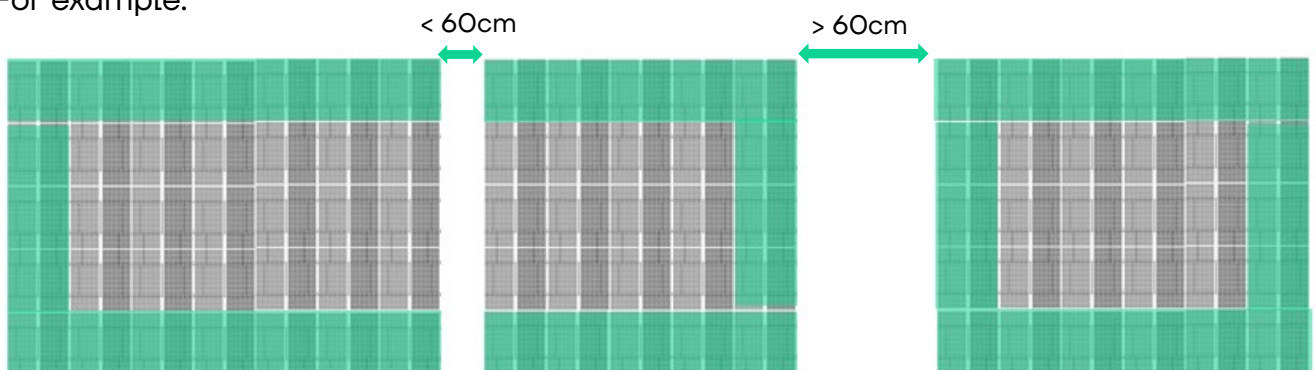

	Shelter with ballast
	Shelter without ballast



DESIGN INSTRUCTIONS

6. Terrain surface: positioning of a shelter


The Amfisol ground mounting system deals with unevenness in the ground surface.

6.1 Slope off the terrain

The Amfisol ground mounting system can be used on terrains with a slope up to five degrees. When the slope is bigger, please contact our technical support team to discuss possibilities.


6.2 Level differences between two shelters

The hinge mechanism of the parallel and serial interconnection allows two adjacent shelters to have a relative inclination of up to **15°** toward each other. This inclination in the same direction cannot be continued for more than two shelters, see 6.1 slope off the terrain.

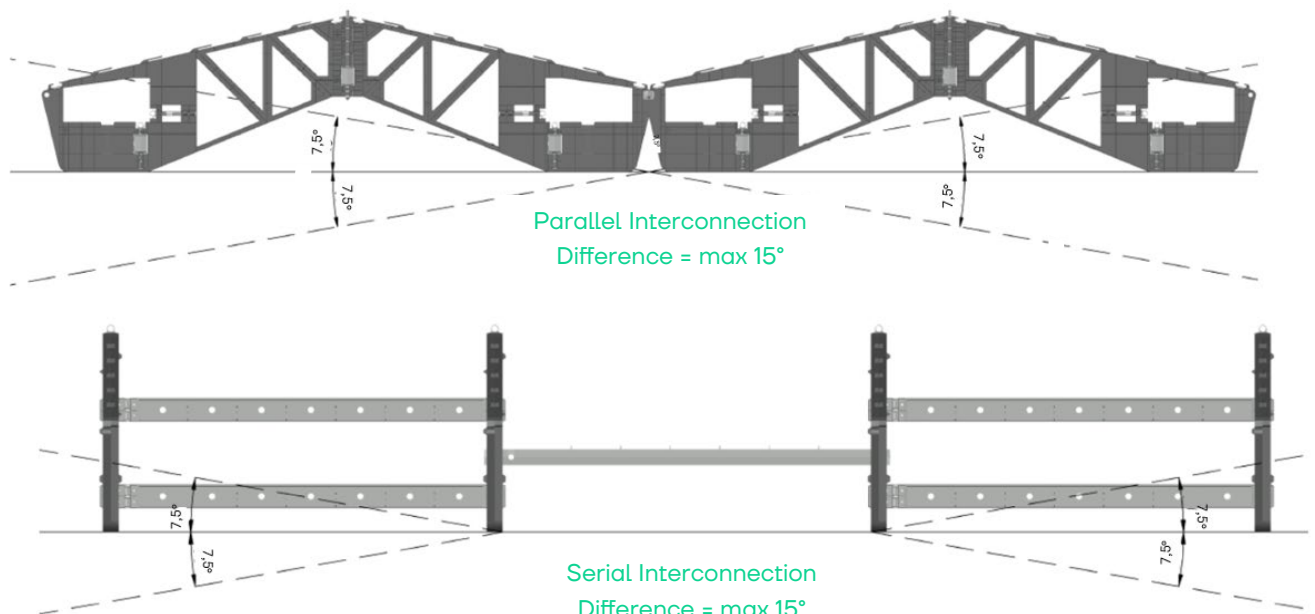

6.3 Level differences within one shelter

The four ground contact points of each shelter must lie within a single plane. This does not mean that this plane must be horizontal, it can be inclined in any direction, provided that the inclination remains within the limits tolerated by the parallel or serial connection between two adjacent shelters.

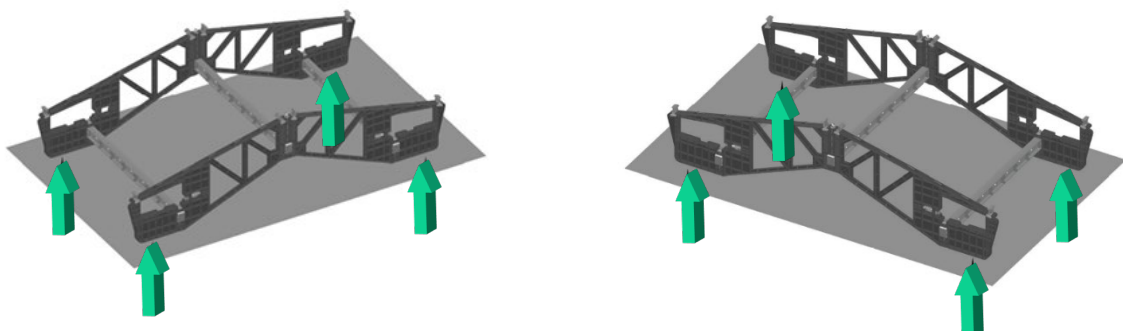

For more information, please check out our website, Youtube page, or contact us. Thanks for using Amfisol!